


产品特点 and 用途 Description of the product

1. 优质铝合金制造箱体，适应全方位的万能安装配置。
2. 充分的冷却筋条，使机体具有优良的热传导性能。
3. 从 025--150 共 10 种机座规格，传递功率范围从 60W—15KW。
4. 速比范围大，每个机座具有从 5:1 到 100:1 的 12 种减速比。
5. 精密磨削加工的硬齿面传动蜗杆，效率高、输出扭矩大。
6. 低噪声平稳运转，能适合在恶劣的环境中长期连续工作。
7. 重量轻，机械强度高。
8. 模块化组合使 PCRW 及 DRW 将 RW 减速机的传动比拓展到：i=5—3200。



1. High quality die casting aluminum alloy housing, suitable for universal mounting.
2. Heat sink design for cooling provides great surface area and higher thermal capacity than the casting iron housings.
3. 8 sizes from 030 to 130, with power scope from 7.5kw to 60kw.
4. Larger speed ratio range. each single frame size has 12 ratios from 5:1 to 100:1.
5. Hardened worm with fine grinding has the features of higher efficiency and big output torque.
6. Low noise and stably running, can adapt long term work condition in terrible environments.
7. Light weight, high mechanical strength.
8. Modularization combination PCRW&DRW extend the ration of RW reducers from i=5:1 to 3200:1.

外形和安装尺寸 Dimensions

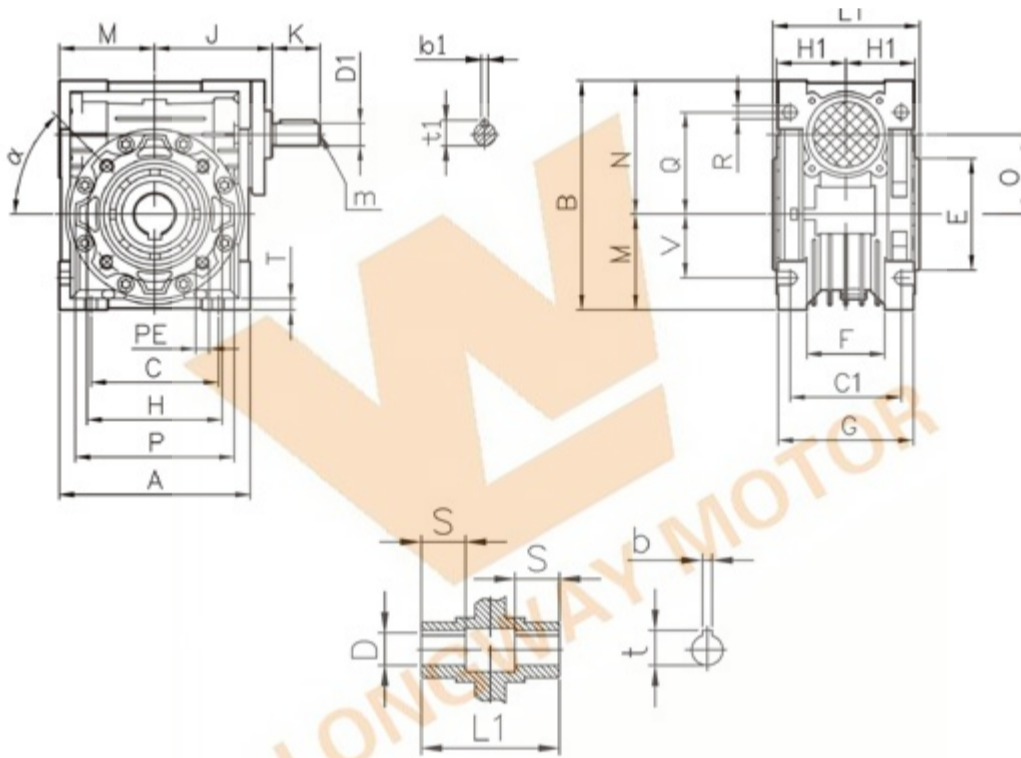

NRW	A	B	C	C1	D(H7)	D1(j6)	E(h8)	F	G	H	H1	J	K	L1	M	N	O	P
030	80	97	54	44	14	9	55	32	56	65	29	51	20	63	40	57	30	75
040	100	121.5	70	60	18(19)	11	60	43	71	75	36.5	60	23	78	50	71.5	40	87
050	120	144	80	70	25(24)	14	70	49	85	85	43.5	74	30	92	60	84	50	100
063	144	174	100	85	25(28)	19	80	67	95	95	53	90	40	112	72	102	63	110
075	172	205	120	90	28(35)	24	95	72	115	115	57	105	50	120	86	119	75	140
090	206	238	140	100	35(38)	24	110	74	130	130	67	125	50	140	103	135	90	160
110	255	295	170	115	42	28	130	-	165	144	74	142	60	155	127.5	167.5	110	200
130	293	335	200	120	45	30	180	-	215	155	81	162	80	170	146.5	187.5	130	250
150	340	400	240	145	50	35	180	-	215	185	96	195	80	200	170	230	150	250

NRW	0	R	S	T	V	PE	b	b1	t	t1	m	a	kg
030	44	5.5	21	5.5	27	M6X11(n=4)	5	3	16.3	10.2	-	0°	1.2
040	55	6.5	26	6.5	35	M6X8(n=4)	6	4	20.8(21.8)	12.5	-	45°	2.3
050	64	8.5	30	7	40	M8X10(n=4)	8	5	28.3(27.3)	16.0	M6	45°	3.8
063	80	8.5	36	8	50	M8X14(n=8)	8	6	28.3(31.3)	21.5	M6	45°	6.2
075	93	11	40	10	60	M8X14(n=8)	8	8	31.1(38.3)	27.0	M8	45°	9
090	102	13	45	11	70	M10X18(n=8)	10	8	38.3(41.3)	27.0	M8	45°	13
110	125	14	50	14	85	M10X18(n=8)	12	8	45.3	31.0	M10	45°	42.5
130	140	16	60	15	100	M12X21(n=8)	14	8	48.8	33.0	M10	45°	59
150	180	18	72.5	18	120	M12X21(n=8)	14	10	53.8	38	M12	45°	87